

PERFORMANCE BULLETIN



YPB#: PB_ALM_Classic165Sport_F90LA_2015-11-09_ALM

Test Date 11/9/15



ALUMA

Craft


Boat Manufactured By:
Alumacraft • 315 West St. Julien Street • St. Peter, MN 56082
507-931-1050 • www.alumacraft.com

PERFORMANCE DATA

RPM	MPH	GPH	MPG
1000	3.8	0.4	9.50
1500	5.4	0.7	7.71
2000	6.6	1.1	6.00
2500	7.6	2.1	3.62
3000	11.0	2.8	3.93
3500	21.0	3.0	7.00
4000	25.4	3.5	7.26
4500	29.2	4.7	6.21
5000	32.7	5.8	5.64
5500	35.6	7.3	4.88
6050	41.2	9.2	4.48

0~20 MPH

5.20

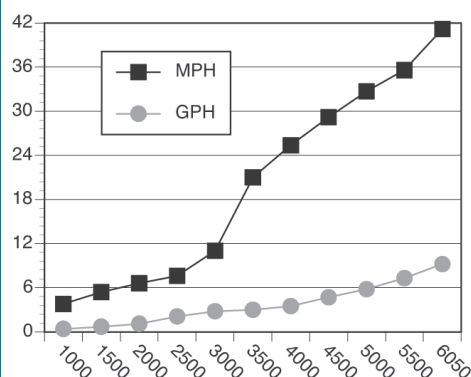

Test performed and verified by Yamaha Applications Engineers.



Alumacraft® Classic 165 Sport

Length	16' 4"
Beam	6' 10"
Dry Weight (Boat Mfr. Pub)	975 lbs
Maximum HP	90
Fuel Capacity	17 gal
Weight as Tested	2,021 lbs

F90LA

Horsepower	90 HP
Induction	EFI
Displacement	97 cu in
Weight	366 lbs
Gear Ratio	2.27:1

ENGINE MOUNTING HEIGHT

Mounting Hole Position	#3
Ventilation Plate Height	1/4" Above Boat Bottom

PROPELLER/S

Series	Aluminum
Diameter/Pitch	13 x 19
Yamaha Part #	6E5-45941-00-00
Propeller Material	Aluminum

TEST CONDITIONS

Number of People	2
Air / Water Temperature (Fahrenheit)	57 / 50° F
Elevation (in feet above sea level)	1060'
Wind Velocity	5-10 mph

Comments: Test weight includes 8 gallons of fuel, 3 batteries, bow-mounted trolling motor, safety and test gear.

Notice to Consumer: The information and data contained in this Performance Bulletin is approximate and subject to many different factors and variables. It is provided as a guideline only and should not be relied upon as representative of actual performance. Your boat's performance may be different than the information contained in this Performance Bulletin due to various factors, including your boat's actual weight, wind and water conditions, temperature, humidity, elevation, bottom paint, boat options affecting wind/water drag and/or boat weight, and operator ability. Please confirm the specifications and performance data on your specific boat/engine combination with your dealer prior to purchase. Please also keep in mind that the data contained in this Performance Bulletin may or may not have been performed using Yamaha PowerMatched components. Yamaha reserves the right to change the specifications and performance data of this Performance Bulletin or engine without notice. This document contains many of Yamaha's valuable trademarks. It may also contain trademarks belonging to other companies. Any references to other companies or their products are for identification purposes only, and are not intended to be an endorsement.

For more information

Yamaha Motor Corporation, U.S.A.
OEM Division, Marine Group

1270 Chastain Road NW
Kennesaw, GA 30144 • (800) 88-YAMAHA

For other Performance Bulletins, visit www.yamahaoutboards.com.

© 2015 Yamaha Motor Corporation, U.S.A. All rights reserved.